


CERTIFIED SLINGS *& Supply*

CROSBY CUSTOM MACHINED SHANK HOOK & NUT QUOTATION REQUEST FORM

Customer Name:		Date:
Address:	City, State, Zip:	
Phone:	Fax:	
Person Completing Form:	E-mail:	
Quotation Due Date:	Product Delivery Date:	
Proposal Number:	Quantity:	

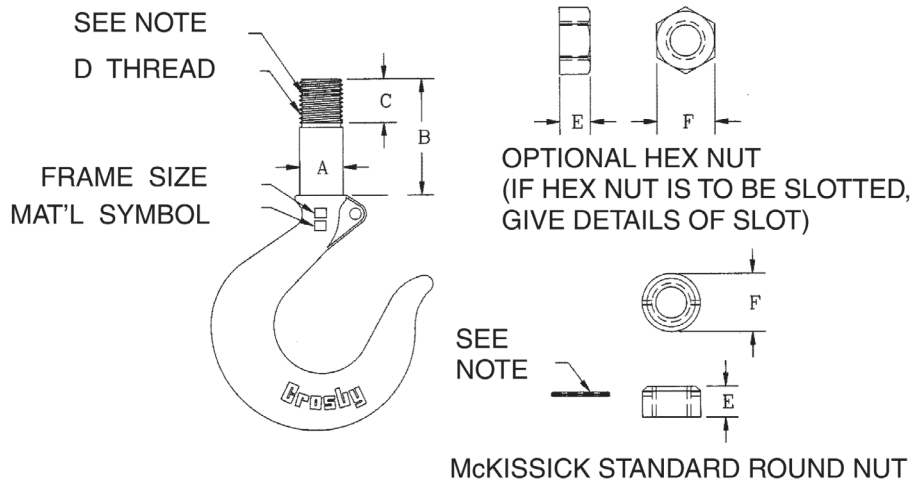

NOTE:
FOR INSTALLATION OF SPRING PIN, STANDARD PRACTICE IS TO FIELD DRILL NUT AND SHANK AFTER ASSEMBLY AND ADJUSTED TAKE-UP IS MADE.

Dimensions:

Frame Size and material Symbol:

Working Load Limit (tons):

A.	Round Nut Hex Nut
B.	E.*
C.*	F.
D.	
	Hook Latch Kit SS-4055 Flipper latch PL Flapper latch 4320 Latch

* The minimum thread length engaged in the nut should not be less than one (1) thread diameter.