

CERTIFIED SLINGS & Supply



SWAGE & SPELTER SOCKET PENNANT LINE QUOTATION REQUEST FORM

Customer Name:		Date:
Address:	City:	State, Zip:
Phone:	Fax:	E-Mail:
Person Completing Form:		Quantity:

PLEASE FILL IN ALL APPROPRIATE DIMENSIONS IN THE SPACES PROVIDED.



<input style="width: 100%; height: 20px;" type="text"/>	Wire Rope Diameter	Wirelock	Zinc Poured (Spelter Only)
<input style="width: 100%; height: 20px;" type="text"/>	Length Required	Configuration:	OS-OS CS-CS OS-CS
<input style="width: 100%; height: 20px;" type="text"/>	Pin Diameter	Wire Rope:	Domestic Import
Swage Spelter		Plane:	Same Plane Opposite Plane

Wire Rope Dia. (in.)	A	B	C	*Rated Load (tons)
1/4	0.69	0.69	1.47	0.68
5/16	0.81	0.81	1.67	1.1
3/8	0.80	0.81	1.67	1.5
7/16	1.0	1.0	1.96	2.0
1/2	1.0	1.0	1.96	2.7
9/16	1.25	1.19	2.21	3.4
5/8	1.25	1.19	2.21	4.1
3/4	1.5	1.38	2.69	5.9
7/8	1.75	1.63	3.2	8.0
1	2.0	2.0	3.68	10
1-1/8	2.25	2.25	4.18	13
1-1/4	2.5	2.5	4.64	16
1-3/8	2.41	2.5	5.25	19
1-1/2	3.0	2.75	6.0	23
1-3/4	3.5	3.75	7.0	31
2	4.0	4.25	9.0	40

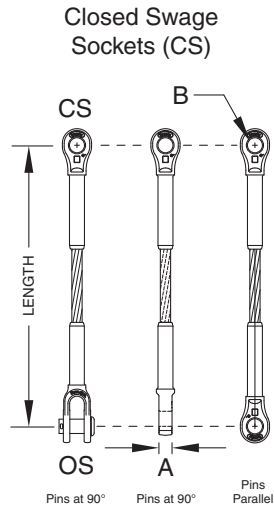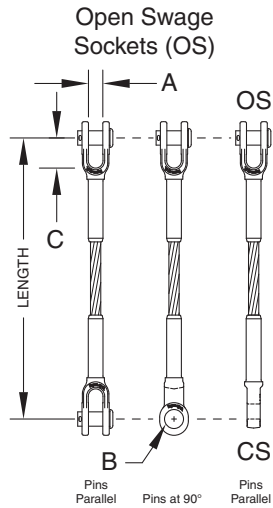

Wire Rope Dia. (in.)	A	B	*Rated Load (tons)
1/4	0.50	0.76	0.68
5/16	0.68	0.88	1.1
3/8	0.68	0.88	1.5
7/16	0.87	1.07	2.0
1/2	0.87	1.07	2.7
9/16	1.14	1.28	3.4
5/8	1.14	1.28	4.1
3/4	1.33	1.49	5.9
7/8	1.53	1.73	8.0
1	1.78	2.11	10
1-1/8	2.03	2.37	13
1-1/4	2.25	2.62	16
1-3/8	2.25	2.62	19
1-1/2	2.56	2.87	23
1-3/4	3.08	3.63	31
2	3.31	3.88	40

Wire Rope Dia. (in.)	A	B	C	*Rated Load (tons)
1/4	0.75	0.69	1.56	0.68
5/16 - 3/8	0.81	0.81	1.75	1.1 - 1.5
7/16 - 1/2	1.0	1.0	2	2.0 - 2.7
9/16 - 5/8	1.25	1.19	2.5	3.4 - 4.1
3/4	1.5	1.38	3	5.9
7/8	1.75	1.63	3.5	8.0
1	2.0	2.0	4	10
1-1/8	2.25	2.25	4.62	13
1-1/4 - 1-3/8	2.5	2.5	5	16 - 19
1-1/2	3.0	2.75	6	23
1-5/8	3.0	3.0	6.5	26
1-3/4 - 1-7/8	3.5	3.75	7	31 - 35
2 - 2-1/8	4.0	4.25	9	40 - 44
2-1/4 - 2-3/8	4.5	4.75	10	49 - 55
2-1/2 - 2-5/8	5.0	5.0	10.75	60 - 66
2-3/4 - 2-7/8	5.25	5.25	11	72 - 78
3 - 3-1/8	5.75	5.5	11.25	85 - 92

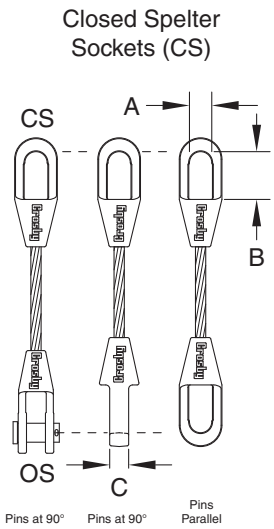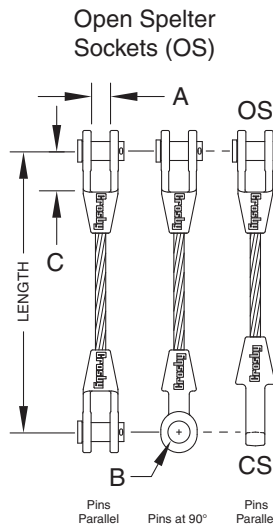

Wire Rope Dia. (in.)	A	B	C	*Rated Load (tons)
1/4	0.88	1.75	0.50	0.68
5/16 - 3/8	0.97	2.05	0.69	1.1 - 1.5
7/16 - 1/2	1.16	2.31	0.88	2.0 - 2.7
9/16 - 5/8	1.41	2.5	1.0	3.4 - 4.1
3/4	1.66	3.06	1.25	5.9
7/8	1.94	3.5	1.5	8.0
1	2.3	4.0	1.75	10
1-1/8	2.56	4.5	2.0	13
1-1/4 - 1-3/8	2.81	5.0	2.25	16 - 19
1-1/2	3.19	6.0	2.5	23
1-5/8	3.25	6.5	2.75	26
1-3/4 - 1-7/8	3.75	7.56	3.0	31 - 35
2 - 2-1/8	4.38	8.81	3.25	40 - 44
2-1/4 - 2-3/8	5.0	9.75	3.63	49 - 55
2-1/2 - 2-5/8	5.5	10.62	4.0	60 - 66
2-3/4 - 2-7/8	6.25	11.25	4.88	72 - 78
3 - 3-1/8	6.75	11.75	5.25	85 - 92

*Ratings based on (EIPS) grade IWRC rope 6 x 19 & 6 x 36.

Reviewed/Approved by: _____ Date: _____